



Eaton County Road Commission

June 13, 2017

Duane A. Eldred
Chair

NOTICE TO BIDDERS

Timothy J. Lamoreaux
Vice Chair

Sealed proposals will be received by the Board of County Road Commissioners of the County of Eaton, Michigan at 1112 Reynolds Road, Charlotte, MI 48813, until 9:30 AM on July 6, 2017, at which time and place proposals will be publicly opened and read aloud for furnishing and delivering the following:

Jerry L. Frazier
Member

HMA BASE CRUSHING AND SHAPING, MODIFIED

Benjamin S. Lyons
Member

Boyer Road From Mt Hope Hwy to St Joe Hwy. – Approximately 14,100 Syd

Dorothy E. Maxwell
Member

The Eaton County Road Commissioners will consider award of the contracts after review by staff.

Blair E. Ballou, P.E.
Engineer-Manager

Further information may be obtained at the offices of the undersigned, 1112 Reynolds Road, Charlotte, MI, 48813, Telephone (517) 543-1630 or (877) 883-2866. Plans, specifications, and bid blanks are available at our office and may be downloaded from our web site at <http://www.eatoncountyroad.com/doing-business-with-us/bid-information>.

Lori N. Friedlis, CPA
Director of Finance

All proposals must be submitted in sealed envelopes bearing the name of the bidder and clearly marked with a notation indicating the project on which the bid is submitted. **All bids must be submitted on the enclosed Bid Blank.**

1112 Reynolds Road
Charlotte, MI 48813

The Board reserves the right to accept or reject any or all bids, to waive irregularities in any proposal, and to make the award in any manner deemed in the best interest of the County of Eaton.

Telephone
517-543-1630
Toll-Free
877-883-2866

BOARD OF COUNTY ROAD COMMISSIONERS
OF THE COUNTY OF EATON, MICHIGAN

Fax
517-543-2608

Email
ecrc@eatoncountyroad.com

Duane A. Eldred, Chair
Timothy J. Lamoreaux, Vice Chair
Dorothy E. Maxwell, Member
Benjamin S. Lyons, Member
Jerry L. Frazier, Member

EATON COUNTY ROAD COMMISSION

2017 HMA Base Crushing and Shaping, Modified

BID BLANK

ITEM OF WORK	QUANTITY	UNIT	UNIT PRICE	AMOUNT
HMA Base Crushing and Shaping, Mod	14,100	SYD	\$ _____	\$ _____
Calcium Chloride Solution, 38%	10,575	Gallon	\$ _____	\$ _____
			GRAND TOTAL BID	\$ _____

COMPANY NAME _____

ADDRESS _____

TELEPHONE _____ Email _____


SIGNED BY _____

DATE _____

EATON COUNTY ROAD COMMISSION BASE CRUSHING AND SHAPING

PROPOSED BASE CRUSHING AND SHAPING

① BOYER ROAD - MT HOPE TO ST JOE

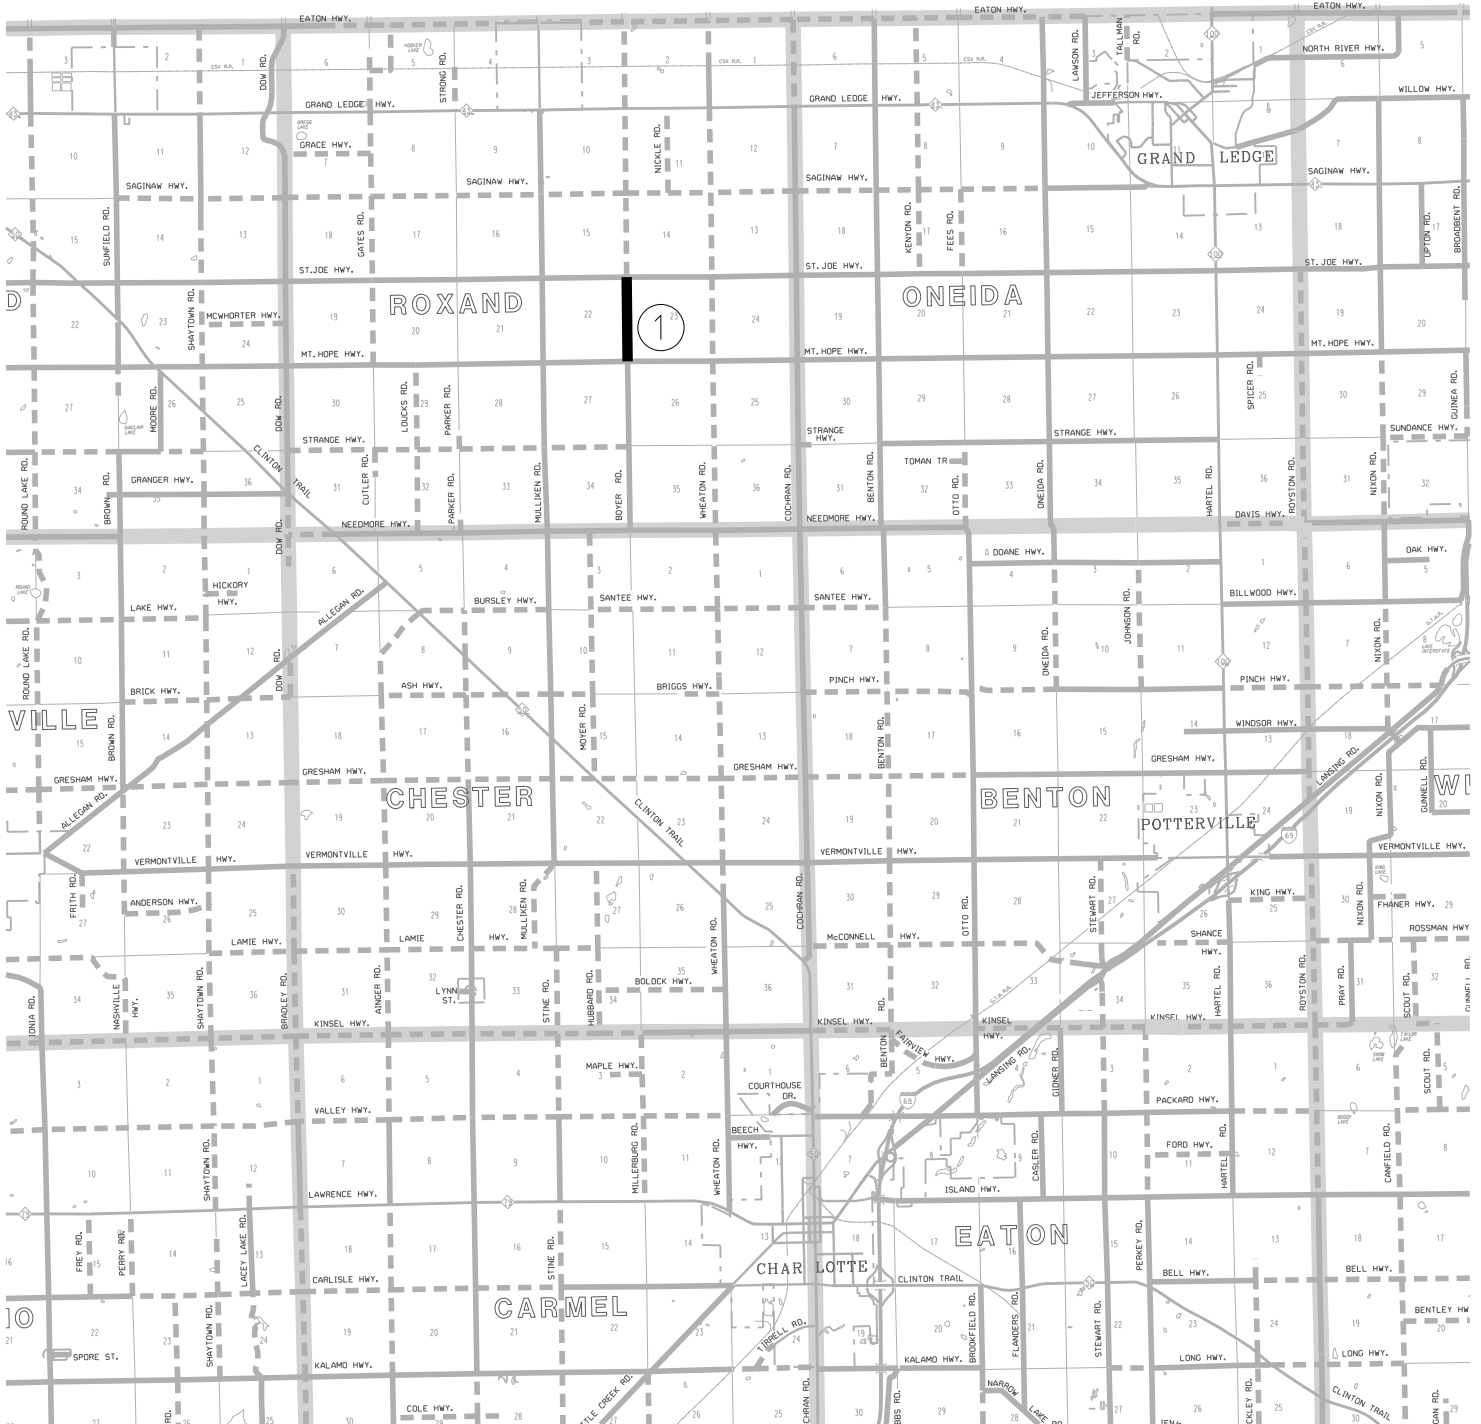

EATON COUNTY ROAD COMMISSION

SPECIAL PROVISION
FOR
HMA BASE CRUSHING AND SHAPING, MODIFIED

ECRC

1 of 2

06-13-17

a. Description. All work, materials, and labor necessary to perform Base Crushing and Shaping, Modified shall be done in accordance with Section 305 of the 2012 MDOT Standard Specifications for Construction and as modified herein.

The location for Base Crushing and Shaping, Modified is Boyer Road between Mt. Hope Hwy. and St. Joe Hwy (14,100 Syd). The project length is 1.0 miles.

b. Equipment. The pulverizer shall be capable of pulverizing the existing pavement to a depth of 6 inches.

c. Construction. All material from the crushing operation shall be incorporated into the road grade during grading operations. Excessive windrows of material from the shaping operation will not be allowed and must be used and balanced on the road.

Prior to crushing, the Road Commission will deliver and spread 22A aggregate to a uniform depth of 3" across the area to be crushed. This material must be incorporated during the crushing operation. The contractor shall contact the Road Commission at least 2 weeks prior to beginning crushing operation to schedule the delivery and spreading operations.

The contractor shall incorporate and thoroughly mix calcium chloride solution into the crushed aggregate. The calcium chloride solution shall be incorporated into the newly crushed aggregate/pavement mixture prior to grading or compacting the crushed material. The calcium chloride solution will be either Calcium Chloride Solution, 38% supplied by the contractor or mineral well brine supplied and delivered by the Road Commission. Total quantity of calcium chloride solution shall be sufficient to meet an application rate of 0.75 gal/syd over a width of 24 feet.

If the calcium chloride solution is supplied and delivered by the Road Commission, the pay item for Calcium Chloride Solution, 38% will be eliminated and no payment will be made to the contractor for this item. The cost for incorporating the calcium chloride solution should be included in the HMA Base Crushing and Shaping, Mod pay item.

The contractor shall grade the newly pulverized surface at a 2 percent cross slope with the crown centered in the crushed area or as directed by the Engineer. After the crushed surface has been graded, the contractor shall compact the surface to a minimum of 98% compaction.

d. Traffic Control. The road will be closed during crushing and shaping operations. Traffic control equipment will be provided by the Eaton County Road Commission. The Contractor shall maintain access to local traffic at all times.

e. Bond and Insurance Requirements. Proof of ADEQUATE INSURANCE COVERAGE by the successful bidder will be required as part of this contract. The successful Bidder shall furnish proof of

BASE CRUSHING AND SHAPING, MODIFIED

Eaton County Road Commission

2 of 2

June 13, 2017

Workers Compensation Insurance and a separate Liability Insurance Policy in favor of the Road Commission naming the Road Commission, its Commissioners, and Employees as an additional named insured, in the amount of \$1,000,000.

The successful Bidder will be required to provide a PERFORMANCE BOND in the amount of 50% of the total contract amount and a LIEN BOND in the amount of 50% of the total contract amount prior to award.

f. Schedule: The completion date for all work in this contract is August 18, 2017.

g. Measurement and Payment. HMA Base Crushing and Shaping, Modified will be paid for by the Square Yard. The pay width for base crushing and shaping will be 24 feet and the length will be the existing HMA surface that is crushed and shaped. Payment will be made for work in full after completion of the specified work.

PAY ITEM

PAY UNIT

HMA Base Crushing and Shaping, Modified

Square Yard

Calcium Chloride Solution, 38%

Gallon